



JTAPMBSSOECP JTAPMBSSOEBA JTAPMBSSOENK JTAPMBSSOEBB JTAPMBSSOEBCO



8



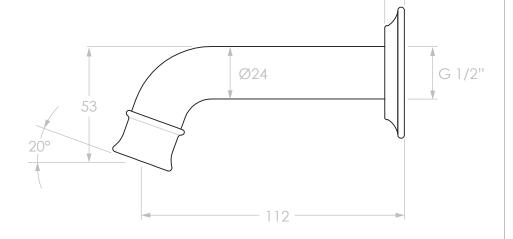

	NOTES:	WATER SUPPLY REQUIREMENTS:	
-	ALL DIMENSIONS ARE NOMINAL AND SUBJECT TO CHANGE. DO NOT DRILL OR ROUGH IN UNTIL YOU HAVE RECEIVED AND MEASURED YOUR PRODUCT. ALL DIMENSIONS ARE IN MILLIMETRES. DO NOT MEASURE FROM DRAWING.	NOT RECOMMENDED FOR GRAVITY FED WATER SYSTEMS OR WATER TANKS. WORKING PRESSURE: 350 – 500KPA (INCLUDING COLD AND HOT WATER PRESSURE) MAXIMUM PRESSURE: 73P51 / 500KPA TEMPERATURE RATING: 5°C - 65°C (MUST NOT EXCEED 70°C) INSTALLATION SHOULD COMPLY WITH AUSTRALIAN STANDARD AS/NZS 3500 OR RELEVANT LOCAL AUTHORITY REQUIREMENTS. S°C (INSTALLATION SHOULD COMPLY WITH AUSTRALIAN STANDARD AS/NZS 3500 OR RELEVANT LOCAL AUTHORITY REQUIREMENTS.	-